




MOTORTRONICS™

Solid State AC Motor Control



Current **TRANSFORMERS**

600V Ansi Rated Window Type

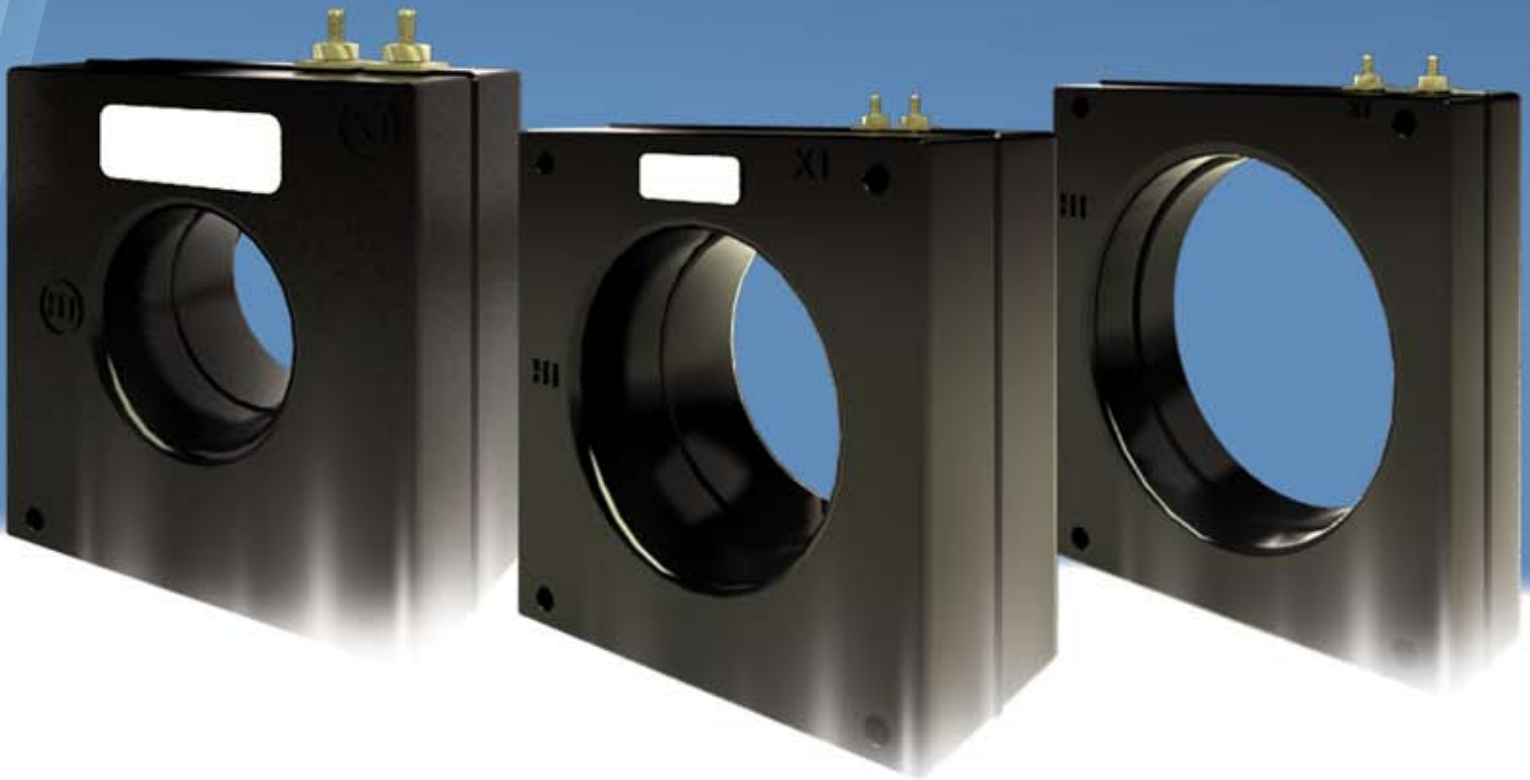

Features:

- Voltage: 600V Ansi Rated Window Type
- Application: Relaying and Metering
- Frequency: 50 - 400 Hz
- Insulation Level: 600 Volts, 10 kV BIL full wave

TRANSFORMERS

600V Current Transformers ANSI Rated Window Type

Frequency: 50 - 400 Hz

Insulation Level: 600 Volts, 10 kV BIL full wave

MODEL 8	Window Sizes 3.25"	Current Ratio Range: 200:5 ~ 4000:5
MODEL 10	Window Sizes 1.56"	Current Ratio Range: 50:5 ~ 600:5
MODEL 19	Window Sizes 4.25"	Current Ratio Range: 300:5 ~ 3000:5
MODEL 21	Window Sizes 1.25", 1.63" 2.00", 2.50" 3.13"	Current Ratio Range: 50:5 ~ 1000:5
MODEL 64	Window Sizes 1.56", 2.00" 2.50"	Current Ratio Range: 50:5 ~ 500:5
MODEL 100	Window Sizes 4.00"	Current Ratio Range: 200:5 ~ 3000:5
MODEL 110	Window Sizes 2.06"	Current Ratio Range: 200:5 ~ 3000:5
MODEL 112-117	Window Sizes 2.25", 2.75" 3.25", 4.00" 4.62"	Current Ratio Range: 50:5 ~ 1200:5
MODEL 115MR	Window Sizes 4.00"	Current Ratio Range: 50:5 ~ 2000:5
MODEL 117MR	Window Sizes 4.62"	Current Ratio Range: 50:5 ~ 2000:5
MODEL 120	Window Sizes 5.75"	Current Ratio Range: 200:5 ~ 4000:5
MODEL 125	Window Sizes 6.31"	Current Ratio Range: 600:5 ~ 4000:5
MODEL 126	Window Sizes 8.25"	Current Ratio Range: 400:5 ~ 5000:5
MODEL 130	Window Sizes 5.75"	Current Ratio Range: 200:5 ~ 4000:5
MODEL 135 / 135MR	Window Sizes 5.75"	Current Ratio Range: 50:5 ~ 5000:5

Motortronics / Phasetronics1600 Sunshine Drive
Clearwater, Florida 33765Tel: 727.573.1819 or 888.767.7792
Fax: 727.573.1803 or 800.548.4104E-mail: sales@motortronics.com
www.motortronics.com

PN: CT-A-600V111611