



# Current Transformer

**Model 592**  
rev 03182021

**CERTIFICATIONS:**



**APPLICATION:**

Relaying

**FREQUENCY:**

50-400 Hz.

**INSULATION LEVEL:**

600 Volts. 10 kV BIL. full wave

**CONTINUOUS THERMAL RATING FACTOR:**

2.0 at 30°C amb., 1.5 at 55°C amb.

**INSULATION SYSTEM:**

Cast in polyurethane resin. Temp. class 130 deg. C. Red

**WINDOW DIAMETER:**

5.00" x 14.00"

**APPROXIMATE WEIGHT:**


150 lbs.

**CONNECTIONS:**

Secondary terminals are No. 10-32 brass studs with one flat washer, lockwasher and regular nut.

<b>Model</b>	<b>592</b>
<b>Window Size</b>	5.00 x 14.00
<b>Width</b>	14.00
<b>Height</b>	23.00
<b>Depth</b>	4.00

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	SECONDARY WINDING RESISTANCE (OHMS @ 75°C)
592-500	50:5	C15	0.014
592-101	100:5	C30	0.028
592-201	200:5	C60	0.056
592-301	300:5	C100	0.097
592-401	400:5	C120	0.123
592-501	500:5	C150	0.161
592-601	600:5	C200	0.193

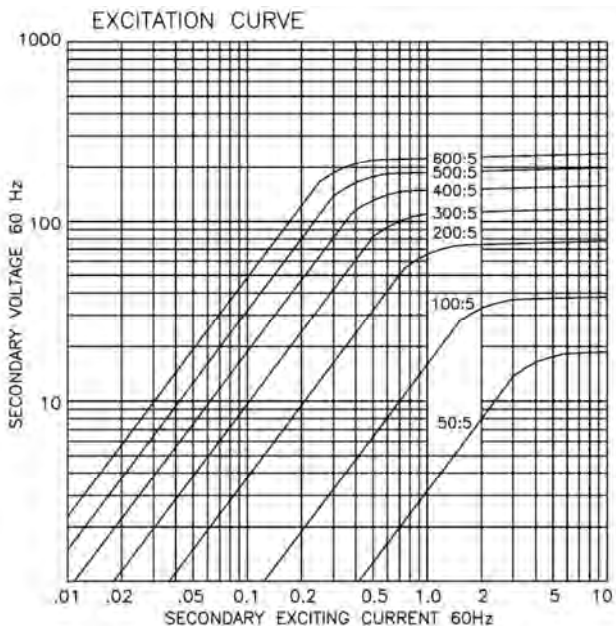

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA

## DIMENSIONS

